



by **Dimplex**

ThruView[™] Electric Fireboxes and Log Sets





The Future of Fireplaces is Clear.[™]

Revillusion[™] is a completely new way of looking at fireplaces, and changing the standard for electric. A clear view through the lifelike flames, to the full brick interior, captures the charm of a wood-burning fireplace. Enjoy the look of a fireplace cut straight from the pages of a magazine by choosing Revillusion[™]; clearly a better fireplace.

Built-in Electric Fireboxes





31¹/4" x 26⁵/8" x 12¹/8" (WxHxD) 79.2 cm x 67.6 cm x 30.7 cm



37¹/₄" x 26⁵/₈" x 12¹/₈" (WxHxD) 94.4 cm x 67.4 cm x 30.7 cm



RBF36P 37¹/₄" x 31¹/₈" x 12¹/₈" (WxHxD) 94.4 cm x 78.8 cm x 30.7 cm



HBF42 43¹/4" x 31" x 12¹/8" (WxHxD) 109.8 cm x 78.8 cm x 30.7 cm



Firebox Features



Revillusion[™] Flame Technology

Flames are larger, brighter and more random, appearing from within the logs.

ThruView[™] Full-depth Design

See clear through the flames to the back of the firebox for a more authentic experience.

Mirage[™] Flame Panel

Partially frosted acrylic panel is clearly better than a mirror, showing only dazzling flames and no reflections.

> Realogs[™] Plus

A full grate of life-size hardwood-cast logs, tiered for greater depth.

Full Brick-surround Firebox

More authentic day or night; 270-degree herringbone brick with natural soot markings.

Mood Lighting Customize the firebox glow with a choice of warm hues, plus midnight mode.



Color Enhancement Adjust the flame base color to red or blue.

Brightness and Flicker

Adjust light level to suit the room and choose flicker effect for enhanced firelight.

Ambient Light Sensor Automatically adjusts firebox light to suit the room day to night.

Quick and Easy Installation

Simply frame, wire and finish - no venting, gas lines or safety screens.

Primary Heat

Option to use 240 volt supply for up to 8,800 BTU - use as part of primary heating plan; heater also operates without flame and can be deactivated.

Direct-wire

Designed to be direct-wired to a 120, 208 or 240 volt circuit for a seamless look (optional plug kit available).







RBFGLASS36 Single Glass Pane shown on Revillusion RBF36

Plug-in Electric Log Sets



Revillusion[™]

Flame Technology Flames are larger, brighter and more random, appearing from within the logs.



ThruView[™]

Full-depth Design See clear through the flames to the back of the fireplace for a more authentic experience.



Mirage[™] Flame Panel

Partially frosted acrylic panel is clearly better than a mirror, showing only dazzling flames and no reflections.

Plus Realogs[™] **Plus** A full grate of life-size hardwood-cast logs, tiered for greater depth.

I Heat On Demand Enjoy the heater without the flames to warm up your room.

360° Light

 360° Light

 Add flickering light to enhance
the firelight effect.

Color Enhancement e/s Adjust the flame base color to red or blue.

Adjust light le Adjust light level to suit the room.

Hidden Heat \approx Fan-forced ceramic heater provides perfect comfort for small spaces.

Just Plug It In (\mathbf{I}) Simply plug into any standard household outlet for instant ambiance.





RLG20 23³/₄" x 19" x 12¹/₂" (WxHxD) 60.3 cm x 48.2 cm x 31.7 cm





25⁵/8" x 19" x 13" (WxHxD) 65.0 cm x 48.2 cm x 32.9 cm

Accessories

Single Glass Pane

Tempered front glass.

RBFGLASS30 RBFGLASS36 RBFGLASS36P RBFGLASS42




REM-KIT - Ash Mat for RLG20 18⁷/8" x 1¹/8" x 5⁵/8" (WxHxD) 47.8 cm x 3.0 cm x 14.1 cm



RBFPLUG 120V power supply cord.



Your authorized Dimplex dealer:

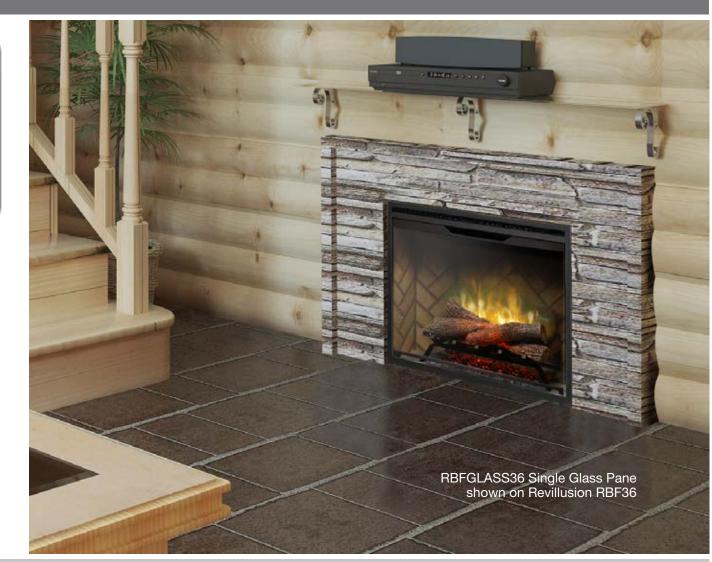

For more information on product specifications, please visit dimplex.com

Dimplex North America Limited 1367 Industrial Road | Cambridge | ON N3H 4W3 Telephone: 1-888-DIMPLEX | Fax: 1-800-668-6665 Visit us online at: www.dimplex.com



Specifications, finishes and dimensions are subject to change and should be taken as a guide only. This product may be covered by one or more U.S. patents or pending patent applications. See www.dimplex.com/patents for details. © 2017 Dimplex North America Limited.



Printed in Canada LI-1011-R03-022117